


Table 1: Electrical Specifications at 25 °C.

PARAMETER	SPECIFICATION LIMITS			UNITS
	MIN	TYP	MAX.	
Coil 1 Inductance (1—3) 0.1Vrms @ 1 KHz	1.165 mH	1.37 mH	-----	mH
Design Parameters: Switching Frequency	-----	150	-----	KHz
DCR (MAX) Coil 1 (1-5) Coil 2 (6-10)	----- -----	----- -----	0.20 0.066	Ω ohm

Figure 1: Schematic Diagram

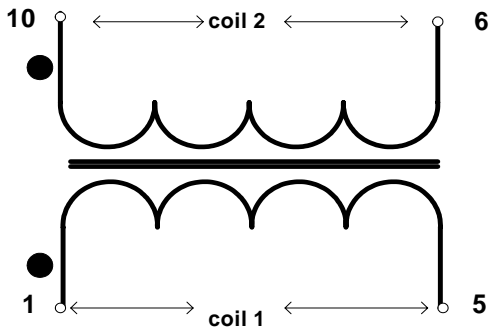

Note:

1. All materials meet UL94V-0 and are non-flammable.
2. All materials rated 130°C.
3. Dimensions in inch, .XX±0.03.
4. All hipot voltage are AC VOLTS RMS specified below at 60 Hz.
The leakage current doesn't exceed 15 μ A rms.
A. 1500V rms mini from (1&5) with respect to (6&10).
B. 1500V rms mini from any pin of coil to core

Figure 2: Physical Dimensions in inch.

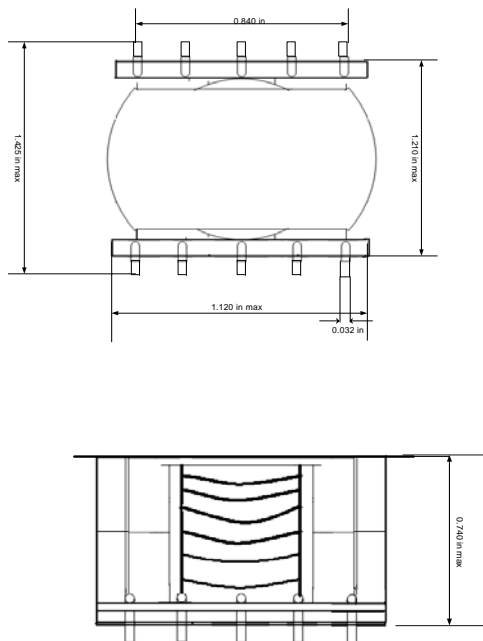


Figure 3: Inductor foot print

