


Table 1: Electrical Specifications at 25 °C.

PARAMETER	SPECIFICATION LIMITS			UNITS
	MIN	TYP	MAX.	
Coil 1 Inductance (2—7) 1Vrms @ 100 KHz	1904.00	2817.00	-----	μH
Coil 1 Leakage Inductance 1Vrms @ 100 KHz (8-9 shorted)	-----	-----	1.7	μH
Design Parameters: Switching Frequency	-----	150	-----	KHz
DCR (MAX) Coil 1 (2-7) Coil 2 (8-9) Coil 3 (12-16)	----- ----- -----	----- ----- -----	215 70 78	mOhm


Figure 1: Schematic Diagram

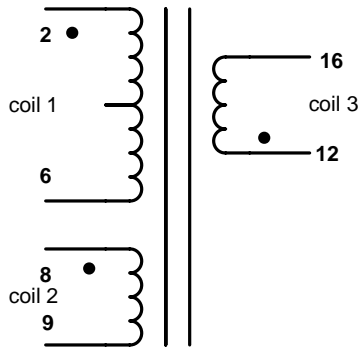

Note:

1. All materials meet UL94V-0 and are non-flammable.
2. All materials rated 130° C.
3. Dimensions in inch, .XX±0.03.
4. All hipot voltage is AC VOLTS specified below
The leakage current doesn't exceed 250 μA rms.
1500V from (2&7) or (8&9) with respect to (12&16)
and core.
500V from (12&16) with respect to core.
1500V from (2&7) with respect to (8&9).

Figure 2: Physical Dimensions in inch

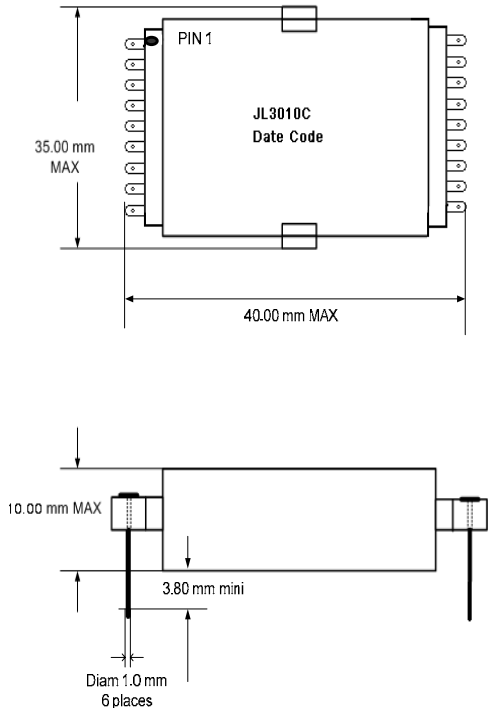

RECOMMENDED PADS LAYOUT

(VIEW IN MOUNTING DIRECTION)

