


Table 1: Electrical Specifications at 25 °C.

PARAMETER	SPECIFICATION LIMITS			UNITS
	MIN	TYP	MAX.	
Coil 1 Inductance (1—2) 1Vrms @ 100 KHz	3.80	1.75	-----	mH
Coil 1 Leakage Inductance 1Vrms @ 100 KHz	-----	-----	2.30	μH
Design Parameters: Switching Frequency	-----	100	-----	KHz
DCR (MAX) Coil 1 (1-2) Coil 2 (11-8) Coil 3 (10-9) Coil 4 (12-7) Coil 5 (5-6)	----- ----- ----- ----- -----	----- ----- ----- ----- -----	65.0 12.0 15.0 115.0 770.0	mOhm

Figure 1: Schematic Diagram

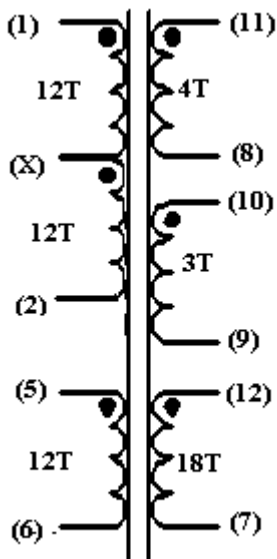

Note:

1. All materials meet UL94V-0 and are non-flammable.
2. All materials rated 130°C.
3. Dimensions in inch, .XX±0.03.
4. All hipot voltage are AC VOLTS RMS specified below at 60 Hz for one minute. The leakage current doesn't exceed 250 μA rms.  
1500V rms from (1&2) or (5&6) with respect to (12&7) and (10&9) and (11&8) and core.  
500V rms from (12&7) with (11&8) and (10&9) respect to core.

Figure 2: Physical Dimensions and foot print in inch.

